


General Description

The LM358P-CN series consists of two independent, high gain, internally frequency compensated operational amplifiers which were designed specifically to operate from a single power supply over a wide range of voltages. Operation from split power supplies is also possible and the low power supply current drain is independent of the magnitude of the power supply voltage.

Application areas include transducer amplifiers, dc gain blocks and all the conventional op amp circuits which now can be more easily implemented in single power supply systems. For example, the LM358P-CN series can be directly operated off of the standard +5V power supply voltage which is used in digital systems and will easily provide the required interface electronics without requiring the additional $\pm 15V$ power supplies.


Features


- Wide power supply range:
 - Single supply: 4V to 32V
 - or dual supplies: $\pm 2V$ to $\pm 16V$
- Very low supply current drain (500 μA)—essentially independent of supply voltage
- Wide bandwidth (unity gain): 1 MHz
- Low Input Bias Currents
- Common Mode Range Extends to Negative Supply

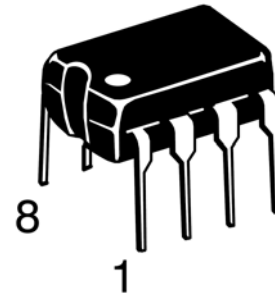

DIP8

PIN CONNECTIONS

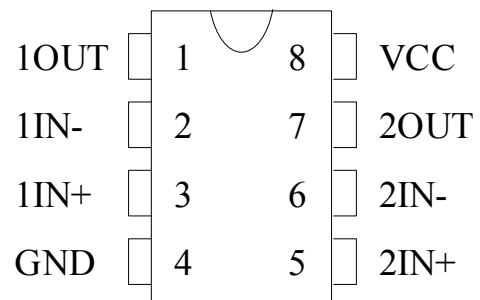

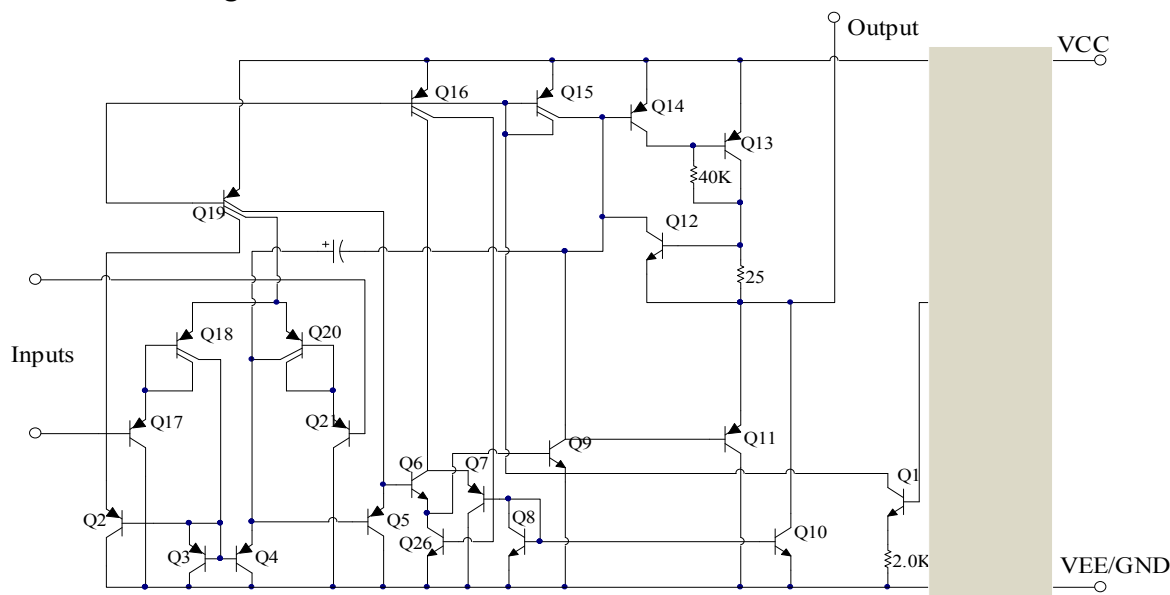Schematic Diagram (One-Half of Circuit Shown)

MAXIMUM RATINGS(TA = +25°C, unless otherwise noted.)

Rating		Value	Unit
Power Supply Voltages		32 or ± 16	V
Input Differential Voltage Range		32	V
Input Common Mode Voltage Range		-0.3 ~ VCC	V
Power Dissipation (Note1)	DIP8	830	mW
	SOP8	530	
Output Short Circuit Duration (One Amplifier) ($V \leq 15V, T_a = 25^\circ C$)		Continuous	
Input Current ($V_{IN} < -0.3V$)		50	mA
Junction Temperature		150	$^\circ C$
Operating Temperature Range		0 ~ 70	$^\circ C$
Storage Temperature Range		-65 ~ 150	$^\circ C$


Note1: LM358P-CN must be derated based on a +150°C maximum junction temperature.

ELECTRICAL CHARACTERISTICS (Vcc=5.0V, TA = +25 °C , unless otherwise noted.)


Parameter	Conditions	LM358			Units
		Min	Typ	Max	
Input Offset Voltage	Ta=25°C, VCC = 5.0 V to 30 V, VO = 1.4 V,		2	5	mV
Input Bias Current	Ta=25°C, IIN(+)或 IIN (-), VCM=0V		45	250	nA
Input Offset Current	Ta=25°C, IIN(+) - IIN (-), VCM=0V		3	50	nA
Input Common Mode Voltage Range	Ta=25°C, V+=30V	0		Vcc -1.5	V

Power Supply Current	Supply	$R_L = \infty$, Total Device	$V_{CC} = 30V$		1	2	mA
			$V_{CC} = 5V$		0.5	1.2	mA
Large Signal Open Loop Voltage Gain		$V_{CC} = 15V$, $T_a = 25^\circ C$, $R_L \geq 2k\Omega$ (for $V_o = 1 \sim 11V$)	25	100			V/mV
Common Mode Rejection		DC, $T_a = 25^\circ C$, $V_{CM} = 0 \sim V_{CC} - 1.5V$	65	90			dB
Power Supply Rejection		DC, $T_a = 25^\circ C$, $V_{CC} = 5 \sim 30V$	65	100			dB
Output Source Current		$V_{IN(+)} = 1V$, $V_{IN(-)} = 0V$, $V_{CC} = 15V$, $V_o = 2V$, $T_a = 25^\circ C$	20	40			mA
Output Sink Current		$V_{IN(-)} = 1V$, $V_{IN(+)} = 0V$, $V_{CC} = 15V$, $V_o = 2V$, $T_a = 25^\circ C$	10	15			mA
		$V_{IN(-)} = 1V$, $V_{IN(+)} = 0V$, $V_{CC} = 15V$, $V_o = 200mV$, $T_a = 25^\circ C$	12	50			μA
Output Short Circuit to Ground		$V_{CC} = 15V$, $T_a = 25^\circ C$		40	60		mA
Output Voltage Swing	VOH	$V_{CC} = 30V$	$R_L = 2k\Omega$	26			V
		$V_{CC} = 30V$	$R_L = 10k\Omega$	27	28		V
	VOL	$V_{CC} = 5V$, $R_L = 10k\Omega$			5	20	mV


Typical Applications

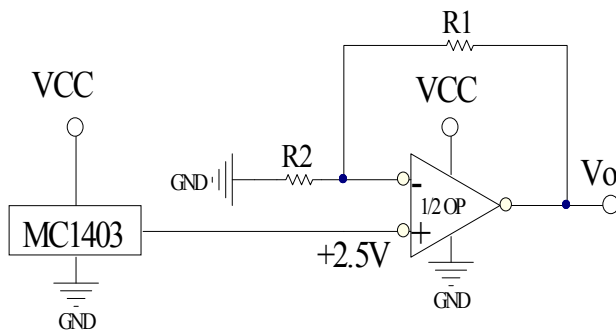


Voltage Reference, $V_o = 2.5V (1 + R_1/R_2)$

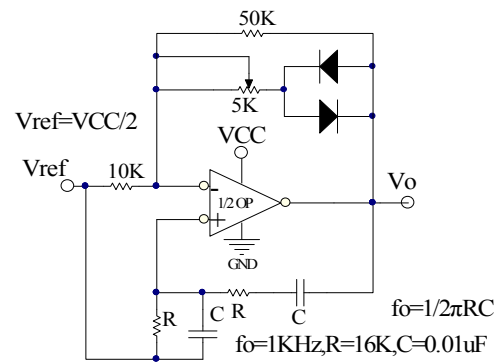


Wien Bridge Oscillator

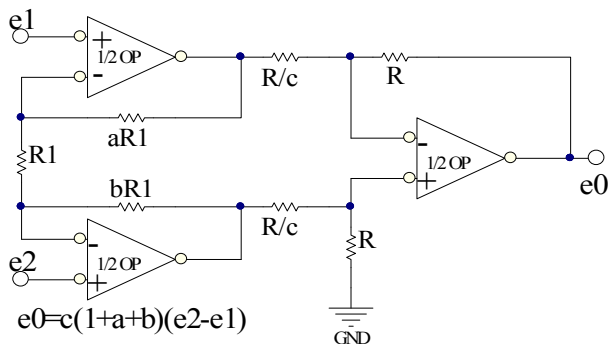


High Impedance Differential Amplifier

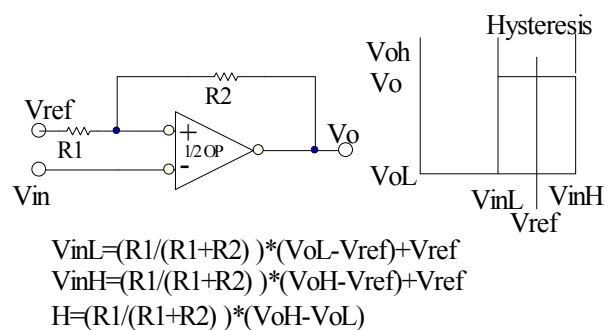

Comparator with Hysteresis

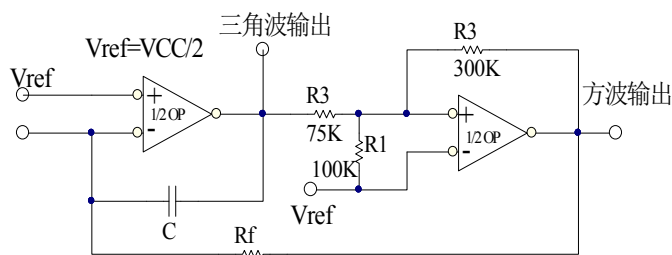


Function Generator

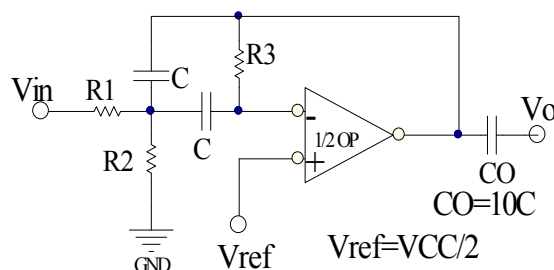


f_o = center frequency

Multiple Feedback Bandpass Filter


Typical Performance Characteristics

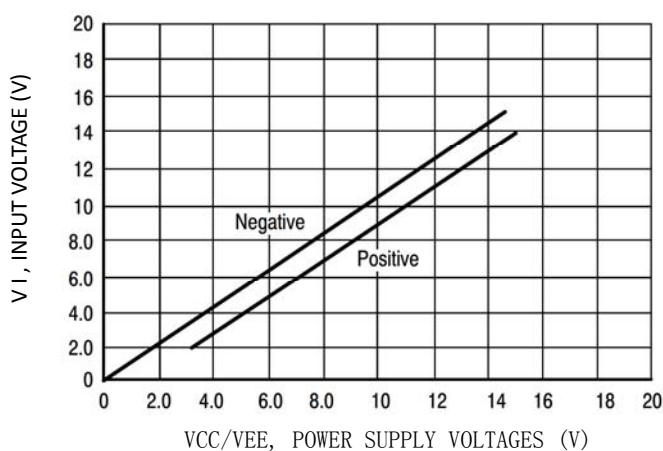


Input Voltage Range

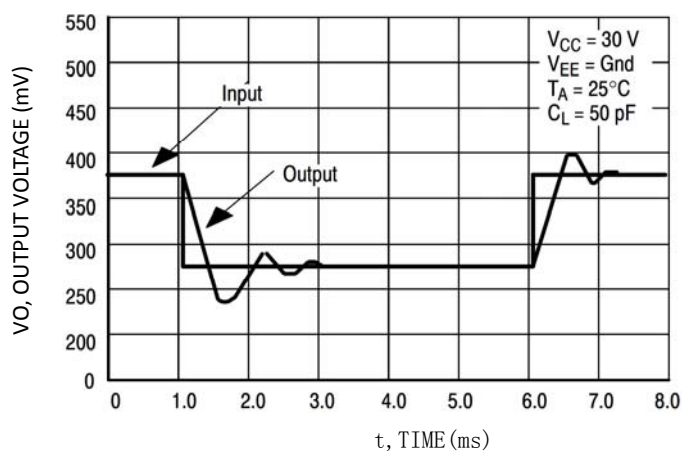

Small Signal Voltage Follower Pulse Response
(Noninverting)

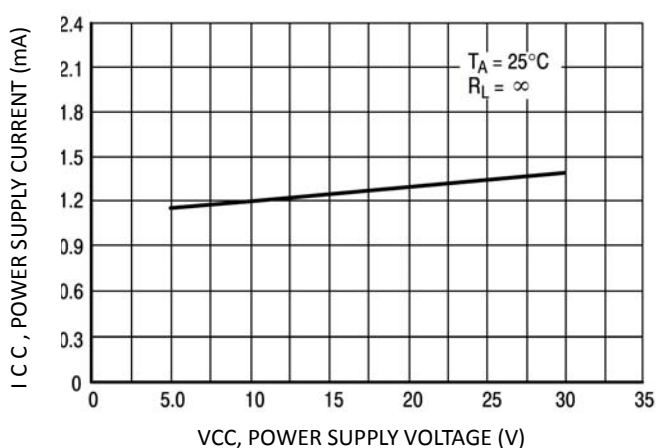


Power Supply Current versus Power Supply Voltage

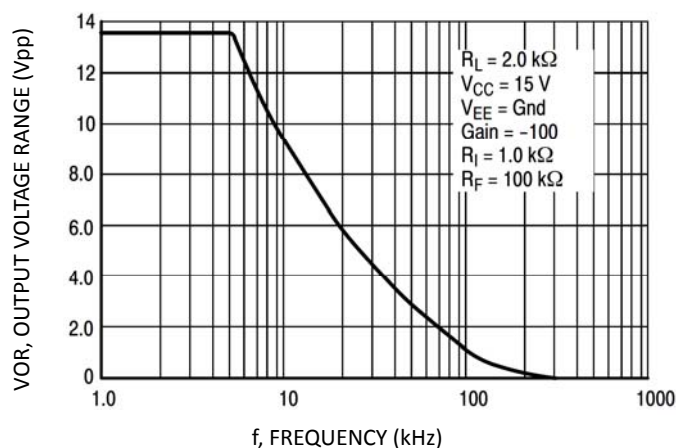

Large-Signal Frequency Response

Physical Dimensions

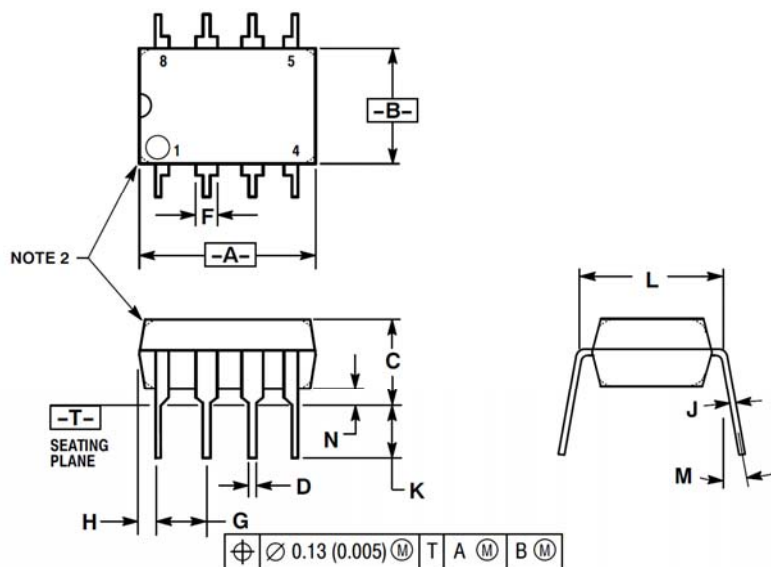

DIP8

NOTES:

1. DIMENSION L TO CENTER OF LEAD WHEN FORMED PARALLEL.
2. PACKAGE CONTOUR OPTIONAL (ROUND OR SQUARE CORNERS).
3. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	9.40	10.16	0.370	0.400
B	6.10	6.60	0.240	0.260
C	3.94	4.45	0.155	0.175
D	0.38	0.51	0.015	0.020
F	1.02	1.78	0.040	0.070
G	2.54 BSC		0.100 BSC	
H	0.76	1.27	0.030	0.050
J	0.20	0.30	0.008	0.012
K	2.92	3.43	0.115	0.135
L	7.62 BSC		0.300 BSC	
M	---	10°	---	10°
N	0.76	1.01	0.030	0.040

NOTICE

The information presented in this document is for reference only. Involving product optimization and productivity improvement, ChipNobo reserves the right to adjust product indicators and upgrade some technical parameters. ChipNobo is entitled to be exempted from liability for any delay or non-delivery of the information disclosure process that occurs.

本文件中提供的信息仅供参考。涉及产品优化和生产效率改善，ChipNobo 有权调整产品指标和部分技术参数的升级，所出现信息披露过程存在延后或者不能送达的情形，ChipNobo 有获免责权。

The product listed herein is designed to be used with residential and commercial equipment, and do not support sensitive items and specialized equipment in areas where sanctions do exist. ChipNobo Co., Ltd or anyone on its behalf, assumes no responsibility or liability for any damages resulting from improper use.

此处列出的产品旨在民用和商业设备上使用，不支持确有制裁地区的敏感项目和特殊设备，ChipNobo 有限公司或其代表，对因不当使用而造成的任何损害不承担任何责任。

For additional information, please visit our website <http://www.chipnobo.com>, or consult your nearest Chipnobo sales office for further assistance.

欲了解更多信息，请访问我们的网站 <http://www.chipnobo.com>，或咨询离您最近的 Chipnobo 销售办事处以获得进一步帮助。