


**FEATURES**

- Low Forward Voltage Drop
- Guard Ring Construction for Transient Protection
- High Conductance
- Also Available in Lead Free Version

**MARKING:**


SD=Device code

The marking bar indicates the cathode

**SOD-523 Plastic-Encapsulate Diodes**
**SOD-523**

**Maximum Ratings @Ta=25°C**


| Parameter                                          | Symbol          | Value      | Unit |
|----------------------------------------------------|-----------------|------------|------|
| Peak repetitive peak reverse voltage               | $V_{RRM}$       | 20         | V    |
| Working peak reverse voltage                       | $V_{RWM}$       |            |      |
| DC blocking voltage                                | $V_R$           |            |      |
| RMS reverse voltage reverse voltage (DC)           | $V_{R(RMS)}$    | 14         | V    |
| Average rectified output current                   | $I_o$           | 0.5        | A    |
| Non-repetitive Peak Forward Surge Current @t=8.3ms | $I_{FSM}$       | 5.5        | A    |
| Power dissipation                                  | $P_D$           | 150        | mW   |
| Thermal resistance junction to ambient             | $R_{\theta JA}$ | 667        | °C/W |
| Operating Junction Temperature Range               | $T_j$           | -40 ~ +125 | °C   |
| Storage Temperature Range                          | $T_{STG}$       | -55 ~ +150 | °C   |

**Electrical Characteristics @Ta=25°C**


| Parameter                         | Symbol     | Min | Typ | Max | Unit    | Conditions       |
|-----------------------------------|------------|-----|-----|-----|---------|------------------|
| Minimum reverse breakdown voltage | $V_{(BR)}$ | 20  |     |     | V       | $I_R=250\mu A$   |
| Forward voltage                   | $V_{F1}$   |     |     | 180 | mV      | $I_F=0.1mA$      |
|                                   | $V_{F2}$   |     |     | 240 |         | $I_F=1mA$        |
|                                   | $V_{F3}$   |     |     | 290 |         | $I_F=10mA$       |
|                                   | $V_{F4}$   |     |     | 380 | mV      | $I_F=100mA$      |
|                                   | $V_{F5}$   |     |     | 600 |         | $I_F=500mA$      |
| Reverse current                   | $I_R$      |     |     | 50  | $\mu A$ | $V_R=10V$        |
| Capacitance between terminals     | $C_T$      |     |     | 30  | pF      | $V_R=1V, f=1MHz$ |

## Typical Characteristics


Forward Characteristics

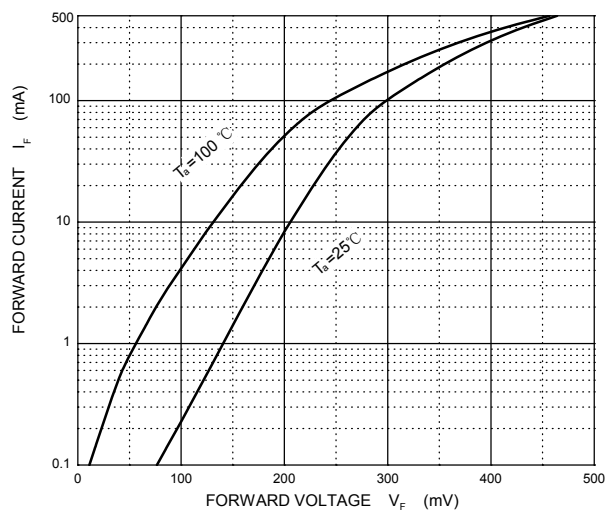


Reverse Characteristics



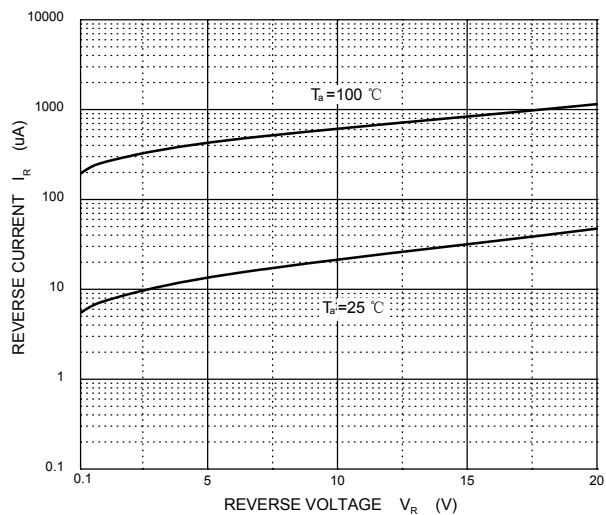


Capacitance Characteristics

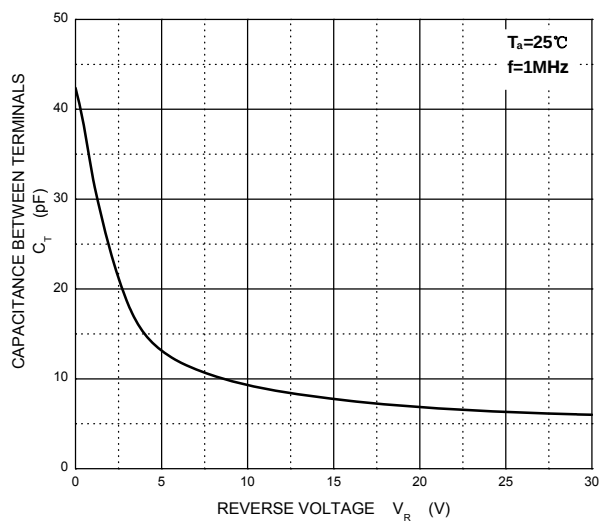


Power Derating Curve

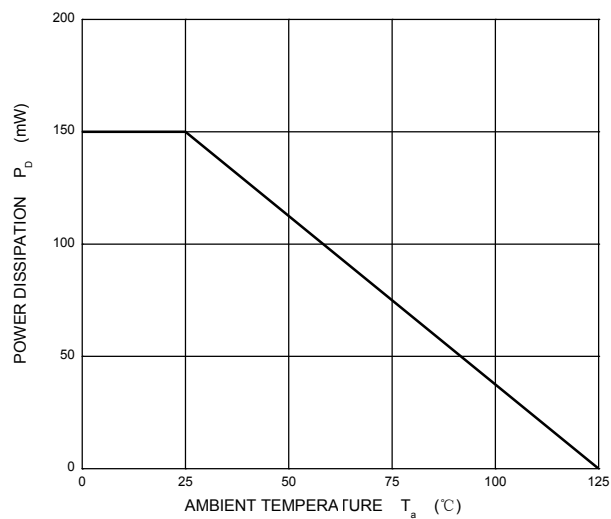

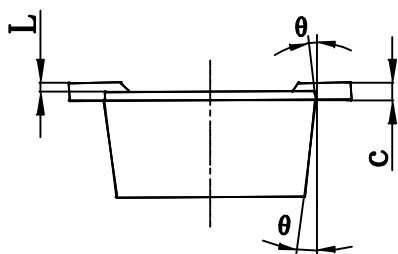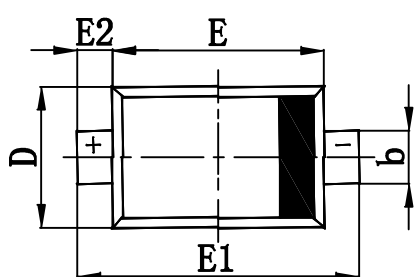**SOD-523 Package Outline Dimensions**


| Symbol | Dimensions In Millimeters |       | Dimensions In Inches |       |
|--------|---------------------------|-------|----------------------|-------|
|        | Min                       | Max   | Min                  | Max   |
| A      | 0.510                     | 0.770 | 0.020                | 0.031 |
| A1     | 0.500                     | 0.770 | 0.020                | 0.028 |
| b      | 0.250                     | 0.350 | 0.010                | 0.014 |
| c      | 0.080                     | 0.150 | 0.003                | 0.006 |
| D      | 0.750                     | 0.850 | 0.030                | 0.033 |
| E      | 1.100                     | 1.300 | 0.043                | 0.051 |
| E1     | 1.500                     | 1.700 | 0.059                | 0.067 |
| E2     | 0.200 REF                 |       | 0.008 REF            |       |
| L      | 0.010                     | 0.070 | 0.001                | 0.003 |
| θ      | 7° REF                    |       | 7° REF               |       |

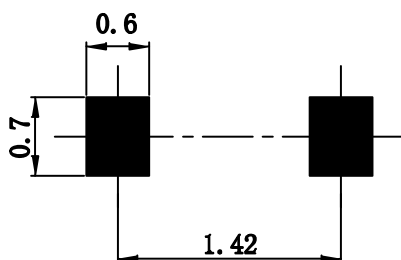
**SOD-523 Suggested Pad Layout**


Note:

1. Controlling dimension: in millimeters.
2. General tolerance:  $\pm 0.05\text{mm}$ .
3. The pad layout is for reference purposes only.

## SOD-523 Tape and Reel

### SOD-523 Embossed Carrier Tape

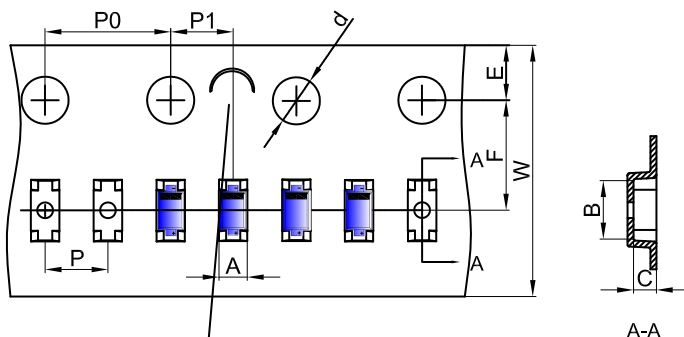


NOTE: TO CAVE 'C' ON CARRIER TAPE PER 120MM

#### Packaging Description:


SOD-523 parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 8,000 units per 7" or 17.8cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).

| Dimensions are in millimeter |     |      |      |       |      |      |      |      |      |      |
|------------------------------|-----|------|------|-------|------|------|------|------|------|------|
| Pkg type                     | A   | B    | C    | d     | E    | F    | P0   | P    | P1   | W    |
| SOD-523                      | 0.9 | 1.94 | 0.73 | Ø1.50 | 1.75 | 3.50 | 4.00 | 2.00 | 2.00 | 8.00 |

### SOD-523 Tape Leader and Trailer

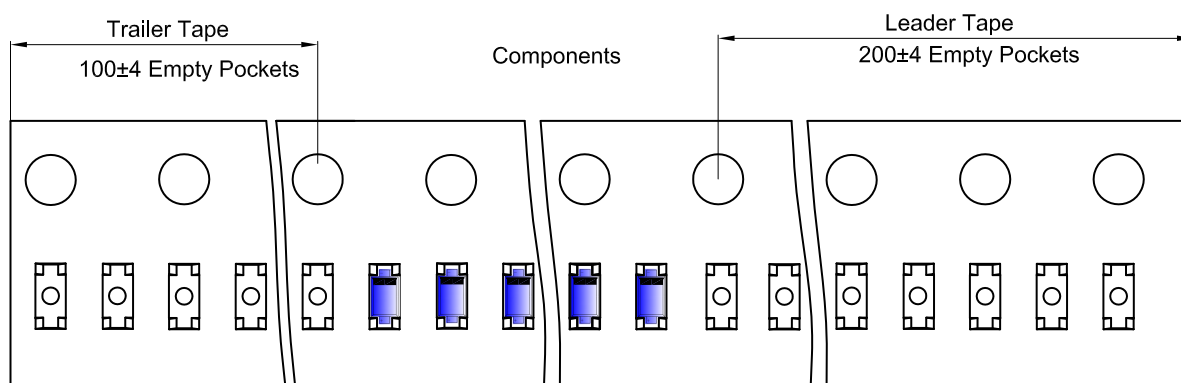

### SOD-523 Reel

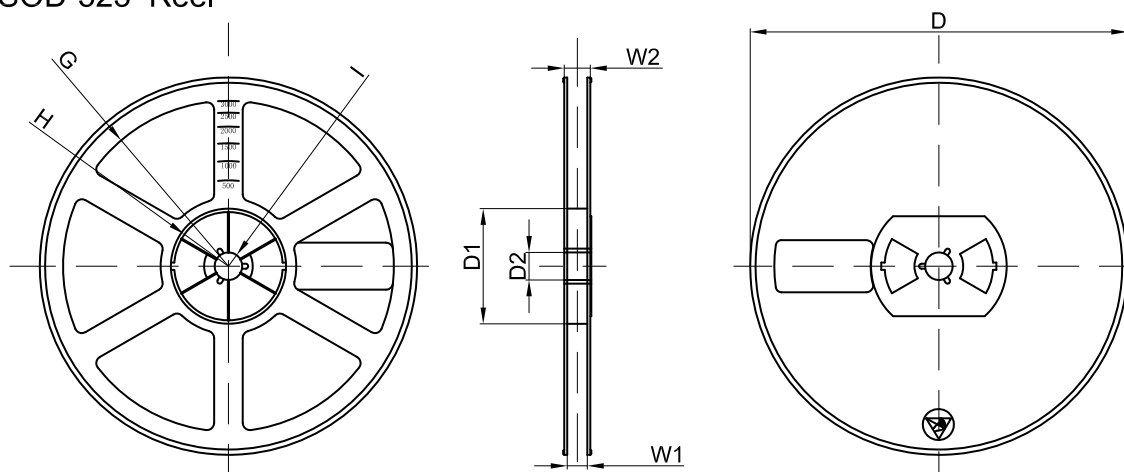

| Dimensions are in millimeter |         |       |       |        |        |       |      |       |
|------------------------------|---------|-------|-------|--------|--------|-------|------|-------|
| Reel Option                  | D       | D1    | D2    | G      | H      | I     | W1   | W2    |
| 7"Dia                        | Ø178.00 | 54.40 | 13.00 | R78.00 | R25.60 | R6.50 | 9.50 | 12.30 |

| REEL     | Reel Size | Box         | Box Size(mm) | Carton      | Carton Size(mm) | G.W.(kg) |
|----------|-----------|-------------|--------------|-------------|-----------------|----------|
| 8000 pcs | 7 inch    | 120,000 pcs | 203×203×195  | 480,000 pcs | 438×438×220     |          |

**NOTICE**

The information presented in this document is for reference only. Involving product optimization and productivity improvement, ChipNobo reserves the right to adjust product indicators and upgrade some technical parameters. ChipNobo is entitled to be exempted from liability for any delay or non-delivery of the information disclosure process that occurs.

本文件中提供的信息仅供参考。涉及产品优化和生产效率改善，ChipNobo 有权调整产品指标和部分技术参数的升级，所出现信息披露过程存在延后或者不能送达的情形，ChipNobo 有获免责权。

The product listed herein is designed to be used with residential and commercial equipment, and do not support sensitive items and specialized equipment in areas where sanctions do exist. ChipNobo Co., Ltd or anyone on its behalf, assumes no responsibility or liability for any damages resulting from improper use.

此处列出的产品旨在民用和商业设备上使用，不支持确有制裁地区的敏感项目和特殊设备，ChipNobo 有限公司或其代表，对因不当使用而造成的任何损害不承担任何责任。

For additional information, please visit our website <http://www.chipnobo.com>, or consult your nearest Chipnobo sales office for further assistance.

欲了解更多信息，请访问我们的网站 <http://www.chipnobo.com>，或咨询离您最近的 Chipnobo 销售办事处以获得进一步帮助。