

Product Summary

$V_{(BR)DSS}$	$R_{DS(on)TYP}$	I_D
100V	15mΩ@10V	8A
	18mΩ@4.5V	


Feature

Fast Switching
Low Gate Charge and Rdson
Advanced Split Gate Trench Technology
100% Single Pulse avalanche energy Test


Applications

Power switching application
Battery management
Uninterruptible power supply


Package

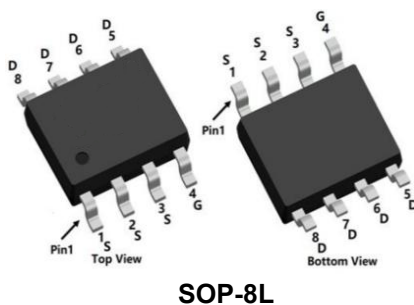

Circuit Diagram



Marking



Order Information

Device	Package	Unit/Tape
IRF7495PBF-CN	SOP-8L	4000

Absolute maximum ratings (Ta=25°C unless otherwise noted)

Parameter	Symbol	Rating	Unit
Drain-Source Voltage	V_{DS}	100	V
Gate-Source Voltage	V_{GS}	± 20	V
Continuous Drain Current	I_D	8	A
Continuous Drain Current (Ta=100°C)	I_D	5.5	A
Pulse Drain Current Tested	I_{DM}	32	A
Single Pulse Avalanche Energy ¹	E_{AS}	72	mJ
Power Dissipation	P_D	3	W
Thermal Resistance Junction-to-Ambient	$R_{\theta JA}$	41.67	°C/W
Storage Temperature Range	T_{STG}	55 to 150	°C
Operating Junction Temperature Range	T_J	55 to 150	°C


Electrical characteristics (Ta=25°C, unless otherwise noted)

Characteristics	Symbol	Test Condition	Min	Typ	Max	Unit
Static Characteristics						
Drain-Source Breakdown Voltage	B _V DSS	I _D = 250μA, V _{GS} = 0V	100	-	-	V
Drain Cut-Off Current	I _{DSS}	V _{DS} = 80V, V _{GS} = 0V	-	-	1	uA
Gate Leakage Current	I _{GSS}	V _{GS} = ±20V, V _{DS} = 0V	-	-	±0.1	nA
Gate Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = 250μA	1.0	1.8	2.5	V
Drain-Source ON Resistance	R _{DS(ON)}	V _{GS} = 10V, I _D = 8A	-	15	19	mΩ
		V _{GS} = 4.5V, I _D = 6A	-	18	24	
Dynamic Characteristics						
Input Capacitance	C _{iss}	V _{DS} =50V, V _{GS} = 0V, f = 1.0MHz	-	1062	-	pF
Output Capacitance	C _{oss}		-	210	-	
Reverse Transfer Capacitance	C _{rss}		-	14	-	
Total Gate Charge	Q _g	V _{DS} =50V , V _{GS} =10V , I _D =8A	-	12	-	nC
Gate-Source Charge	Q _{gs}		-	4.3	-	
Gate-Drain Charge	Q _{gd}		-	2.3	-	
Switching Characteristics						
Turn-On Delay Time	t _{d(on)}	V _{GS} = 10V, V _{DS} =50V, I _D =8A R _G = 2.2Ω	-	33	-	nS
Rise Time	t _r		-	10.4	-	
Turn-Off Delay Time	t _{d(off)}		-	44	-	
Fall Time	t _f		-	14.7	-	
Drain-Source Body Diode Characteristics						
Source-Drain Diode Forward Voltage	V _{SD}	V _{GS} =0V , I _S =1A , T _J =25°C	-	-	1.2	V
Maximum Body-Diode Continuous Current	I _S		-	-	8	A
Reverse Recovery Time	T _{rr}	I _S =8A, di/dt=100A/us, T _J =25°C	-	40	-	nS
Reverse Recovery Charge	Q _{rr}		-	42	-	nC


Note:

- The EAS test condition is $V_{DD} = 50V, V_{GS} = 10V, L = 0.5mH, R_G = 25\Omega$


Typical Characteristics

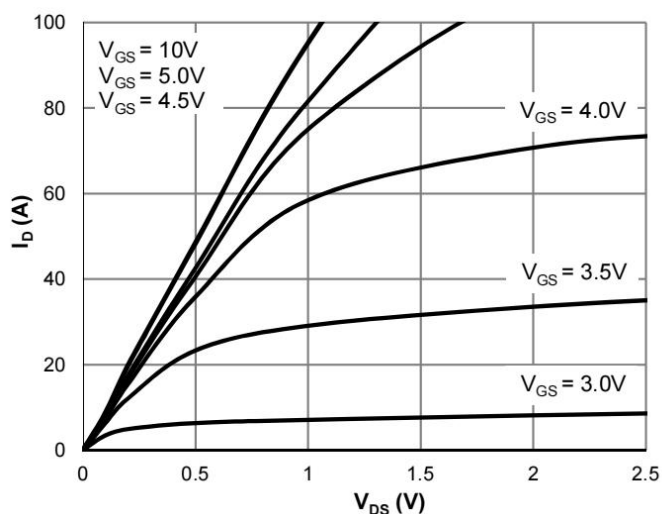


Typical Output Characteristics

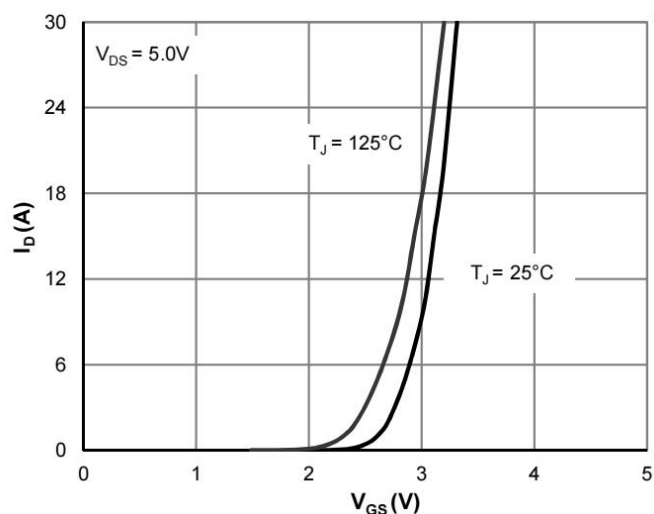


Transfer Characteristics

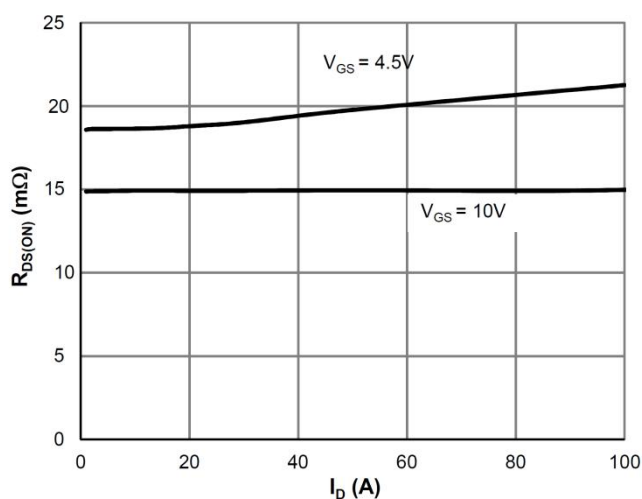


On-Resistance vs. Drain Current

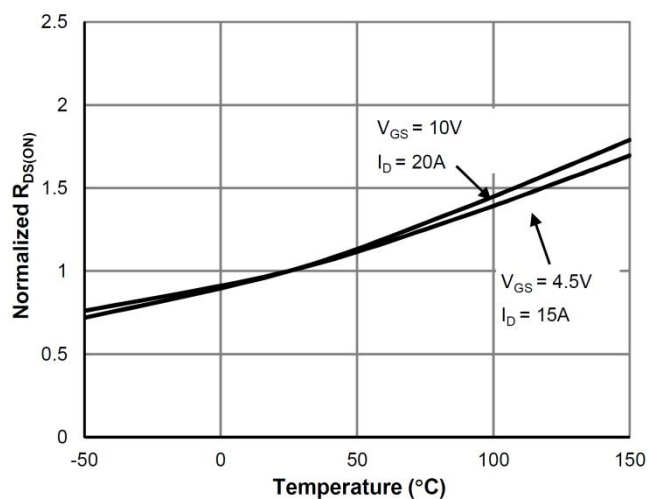






On-Resistance vs. Junction Temperature

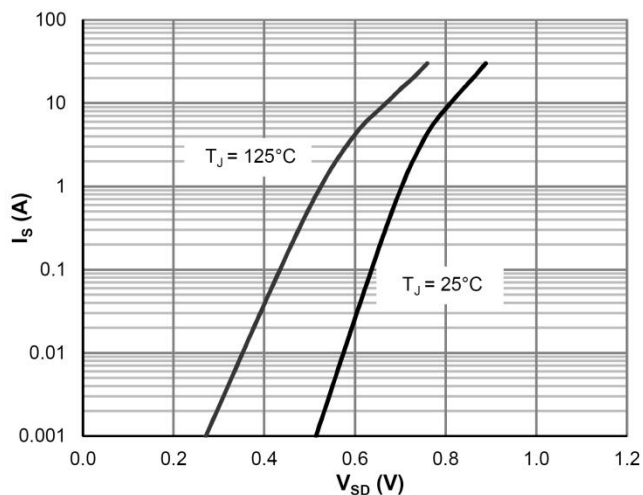


Body-Diode Characteristics

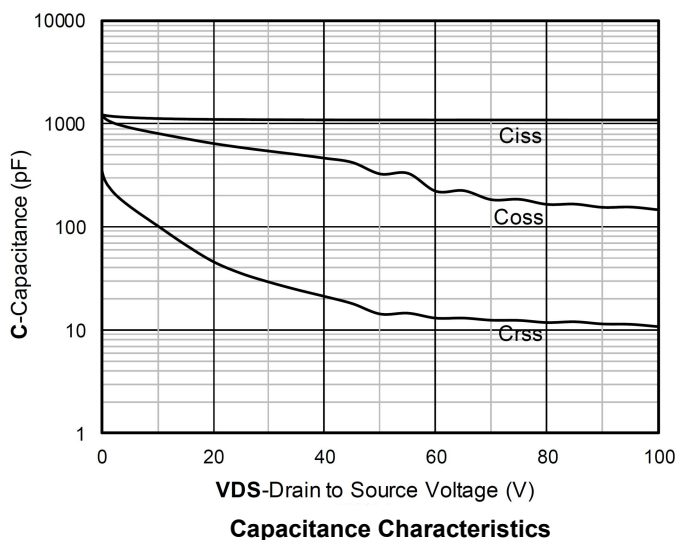

Capacitance Characteristics

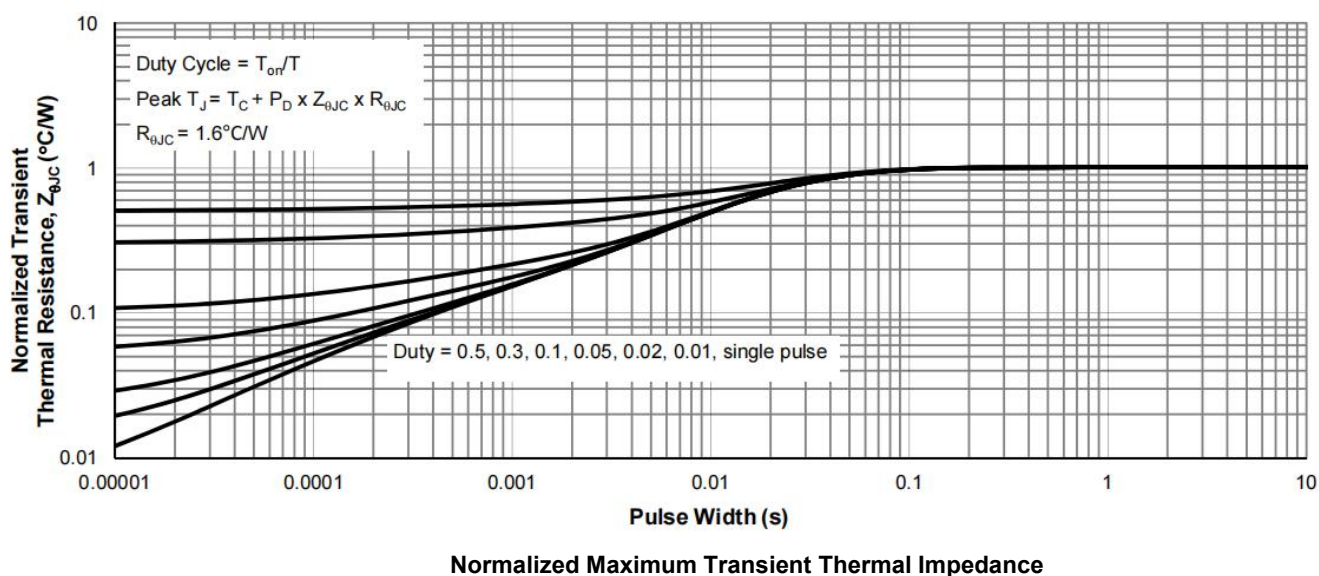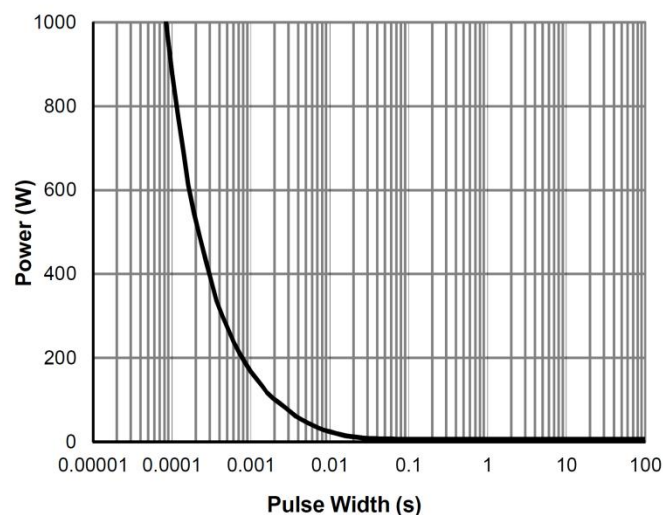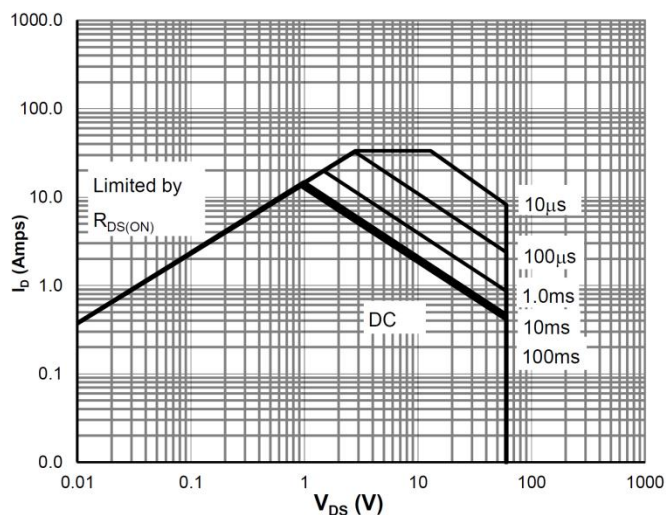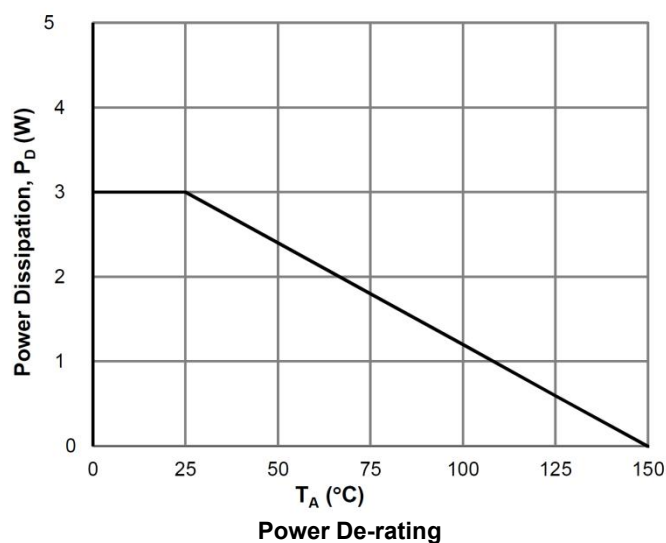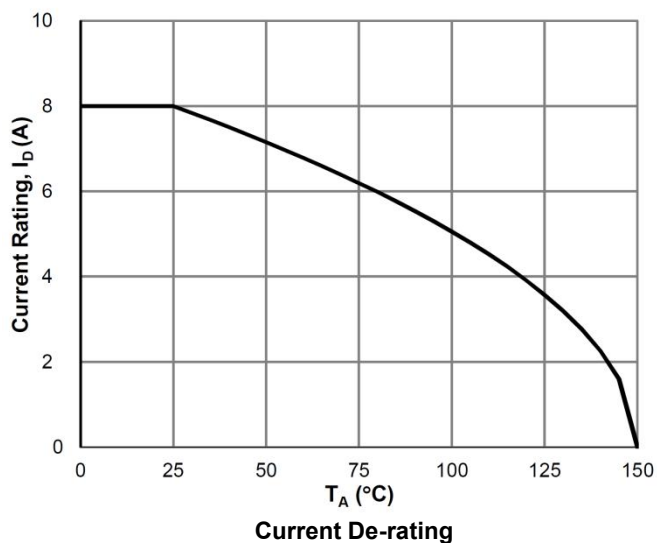

SOP-8L Package Information

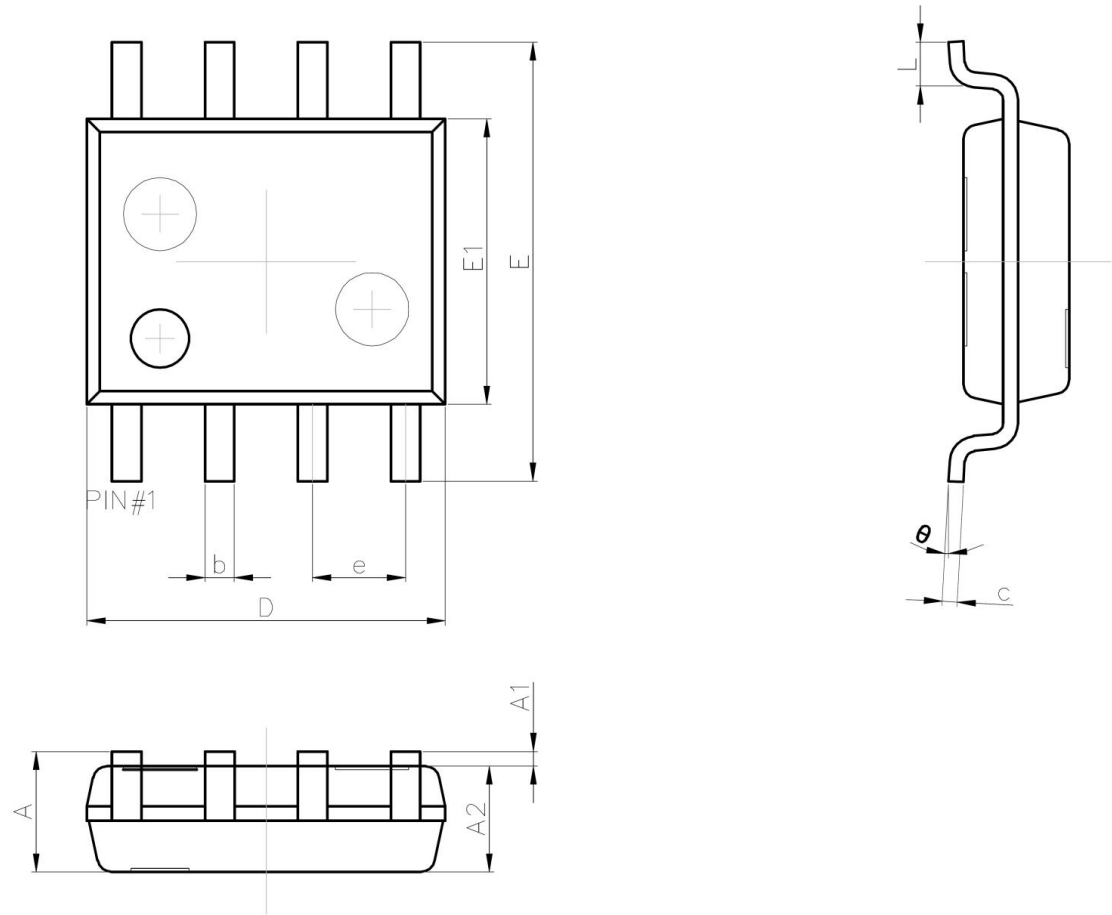

Symbol	Dimensions In Millimeters	
	Min.	Max.
A	1.35	1.75
A1	0.10	0.25
A2	1.35	1.55
b	0.33	0.51
c	0.17	0.25
D	4.80	5.00
e	1.27 REF.	
E	5.80	6.20
E1	3.80	4.00
L	0.40	1.27
θ	0°	8°

NOTICE

The information presented in this document is for reference only. Involving product optimization and productivity improvement, ChipNobo reserves the right to adjust product indicators and upgrade some technical parameters. ChipNobo is entitled to be exempted from liability for any delay or non-delivery of the information disclosure process that occurs.

本文件中提供的信息仅供参考。涉及产品优化和生产效率改善，ChipNobo 有权调整产品指标和部分技术参数的升级，所出现信息披露过程存在延后或者不能送达的情形，ChipNobo 有获免责权。

The product listed herein is designed to be used with residential and commercial equipment, and do not support sensitive items and specialized equipment in areas where sanctions do exist. ChipNobo Co., Ltd or anyone on its behalf, assumes no responsibility or liability for any damages resulting from improper use.

此处列出的产品旨在民用和商业设备上使用，不支持确有制裁地区的敏感项目和特殊设备，ChipNobo 有限公司或其代表，对因不当使用而造成的任何损害不承担任何责任。

For additional information, please visit our website <https://www.chipnobo.com/en> or consult your nearest Chipnobo sales office for further assistance.

欲了解更多信息，请访问我们的网站 <https://www.chipnobo.com/en>，或咨询离您最近的 Chipnobo 销售办事处以获得进一步帮助。