

Product Summary

$V_{(BR)DSS}$	$R_{DS(on)TYP}$	I_D
60V	1.7Ω@10V	300mA
	1.8Ω@4.5V	


Feature

High power and current handing capability
Surface mount package

Application


Battery Switch
DC/DC Converter

Package




SOT-23

Circuit diagram



Marking

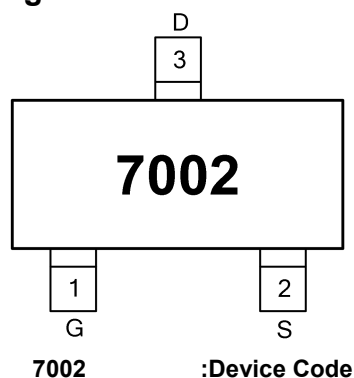

Order Information

Device	Package	Unit/Tape
2N7002P,215-CN	SOT-23	3000


Absolute maximum ratings (Ta=25°C, unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DSS}	60	V
Gate-Source Voltage	V_{GSS}	± 20	V
Continuous Drain Current	I_D	300	mA
Pulse Drain Current Tested	I_{DM}	1200	mA
Power Dissipation	P_D	350	mW
Thermal Resistance Junction-to-Ambient	$R_{\theta JA}$	357	°C/W
Storage Temperature Range	T_{STG}	-55 to 150	°C
Operating Junction Temperature Range	T_J	-55 to 150	°C


Electrical characteristics (Ta=25°C, unless otherwise noted)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Static Characteristics						
Drain-Source Breakdown Voltage	BV _{DSS}	VGS=0V , ID=250μA	60	-	-	V
Drain-Source Leakage Current	I _{DSS}	VDS=48V , VGS=0V	-	-	1	uA
Gate-Source Leakage Current	I _{GSS}	VGS=±20V , VDS=0V	-	-	±1	uA
Gate Threshold Voltage	VGS(th)	VDS=VGS , ID=250μA	1	1.5	2.5	V
Static Drain-Source On-Resistance	R _{DS(ON)}	VGS =10V, ID =200mA	-	1.7	3	Ω
		VGS =4.5V, ID =200mA	-	1.8	4	
Dynamic characteristics						
Input Capacitance	C _{iss}	VDS=25V , VGS=0V , f=1MHz	-	28	-	pF
Output Capacitance	C _{oss}		-	10	-	
Reverse Transfer Capacitance	C _{rss}		-	5	-	
Total Gate Charge	Q _g	VDS=10V , VGS=4.5V , ID=300mA	-	1.7	-	nC
Gate-Source Charge	Q _{gs}		-	0.35	-	
Gate-Drain Charge	Q _{gd}		-	0.5	-	
Switching Characteristics						
Turn-On Delay Time	t _{d(on)}	VDD=30V VGS=10V , RG=25Ω , ID=300mA	-	3	-	nS
Turn-On Rise Time	t _r		-	17	-	
Turn-Off Delay Time	t _{d(off)}		-	10	-	
Turn-Off Fall Time	t _f		-	21	-	
Source-Drain Diode characteristics						
Diode Forward Voltage	V _{SD}	VGS=0V , IS=1A , TJ=25℃	-	-	1.2	V


Typical Characteristics

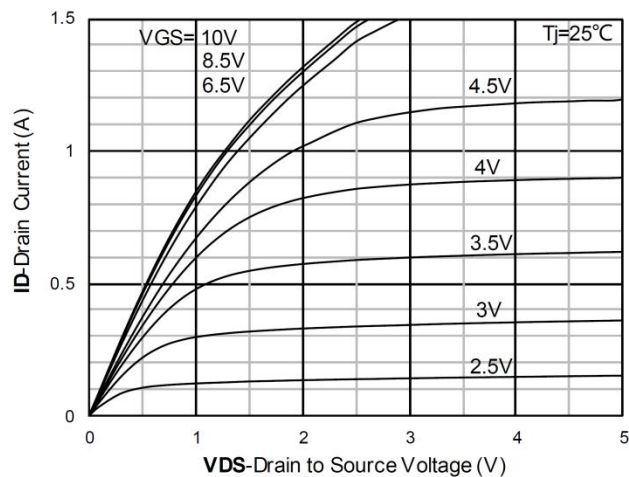


Output Characteristics

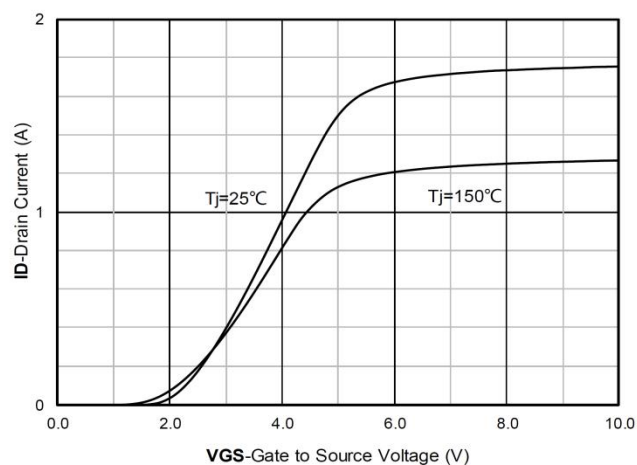


Transfer Characteristics

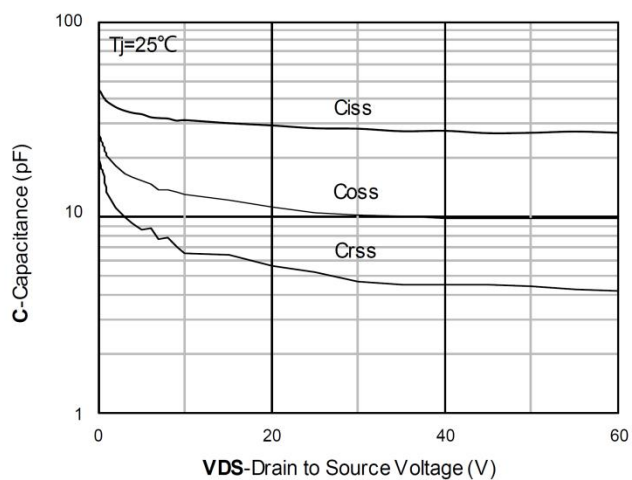


Capacitance Characteristics

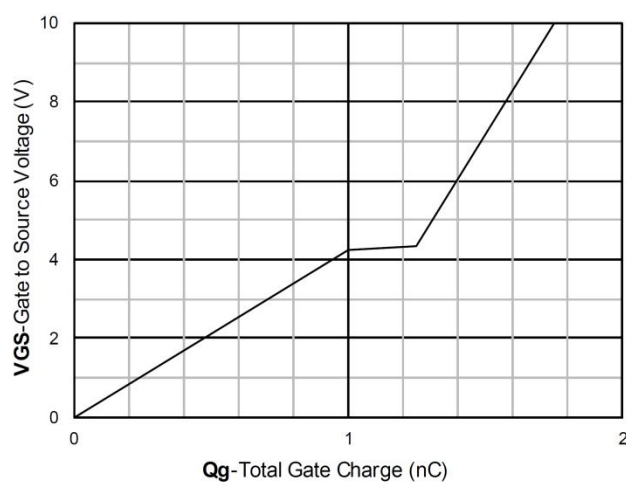


Gate Charge

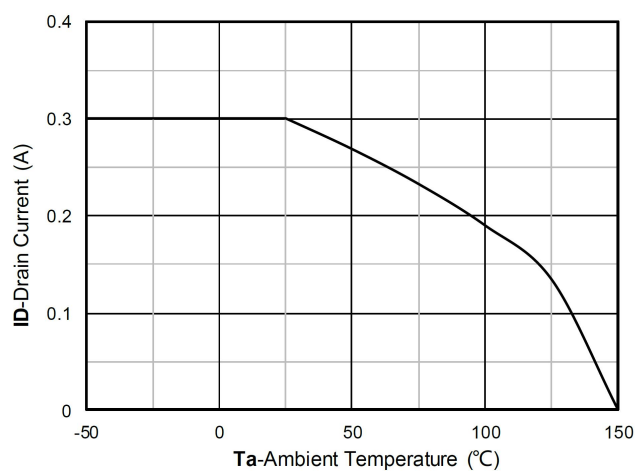


Current dissipation

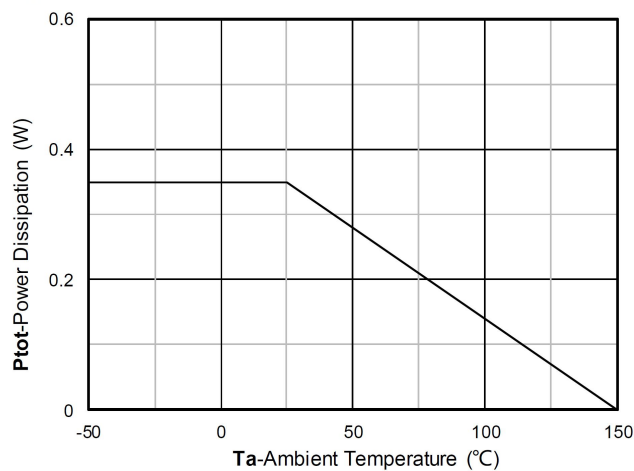


Power dissipation

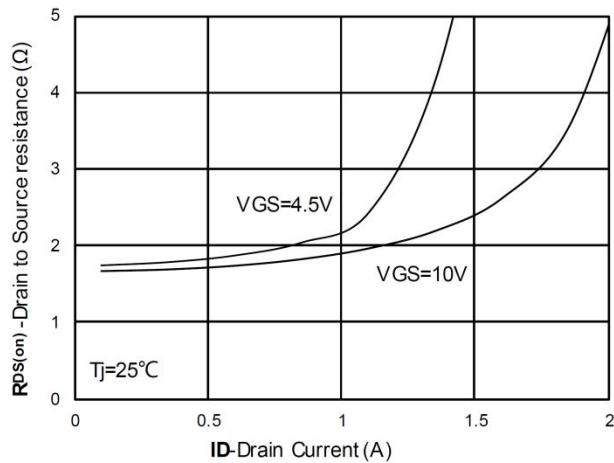


$R_{DS(on)}$ VS Drain Current

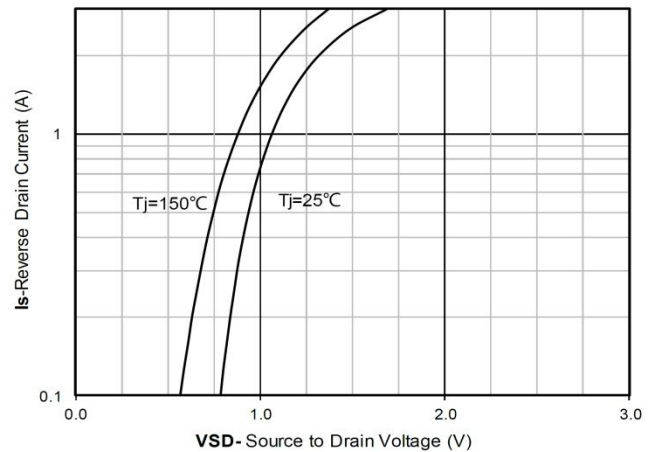


Forward characteristics of reverse diode

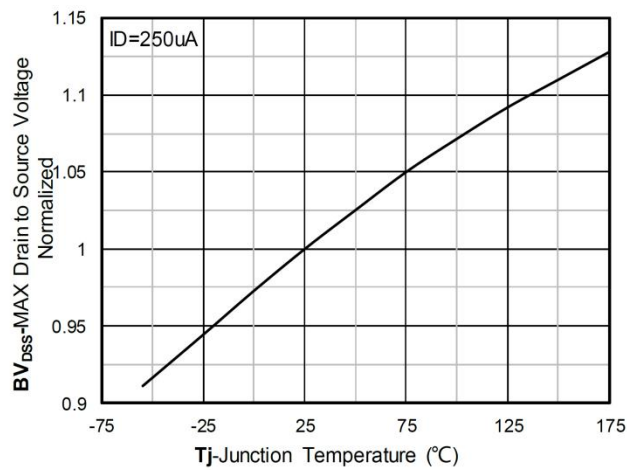


Normalized breakdown voltage

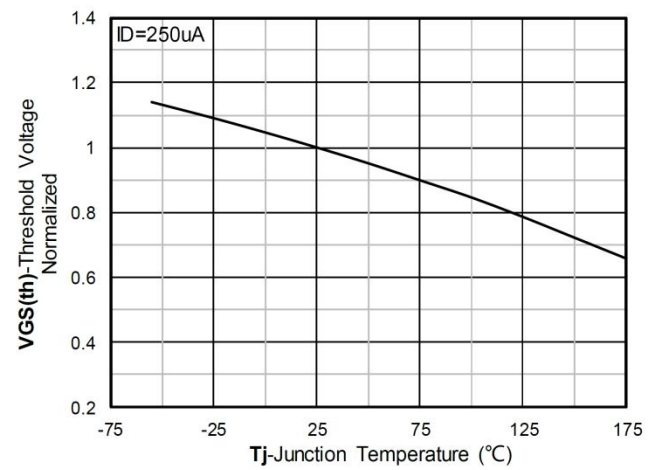

Normalized Threshold voltage

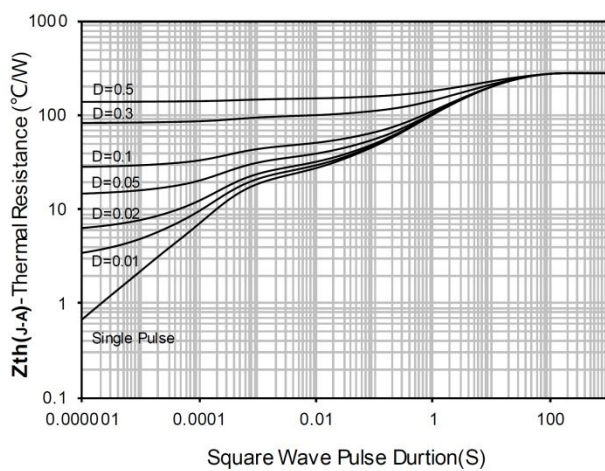


Maximum Transient Thermal Impedance

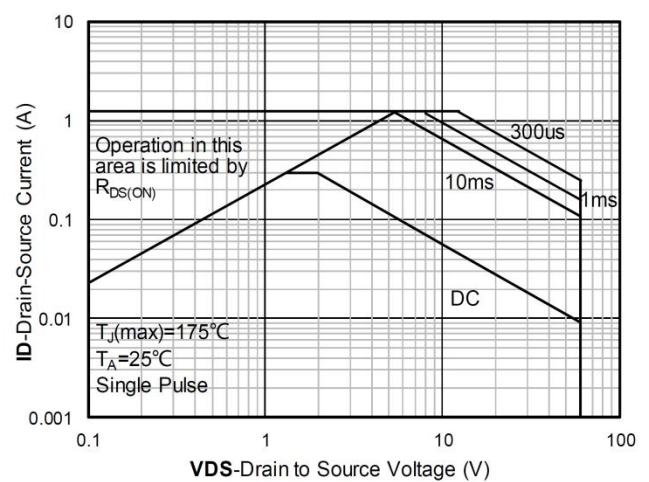

Safe Operation Area

SOT-23 Package Information

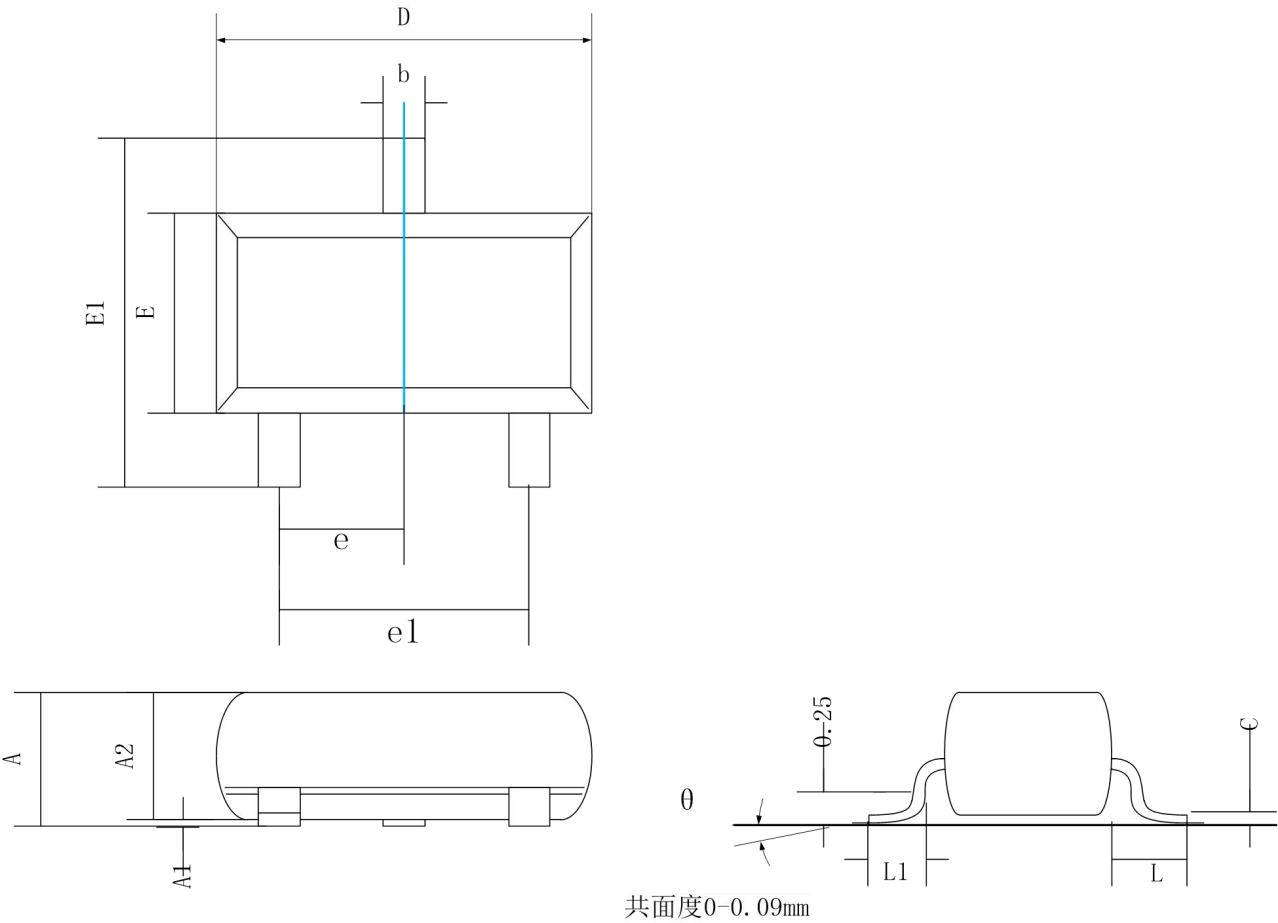

Symbol	Dimensions In Millimeters	
	Min.	Max.
A	0.90	1.15
A1	0.00	0.10
A2	0.90	1.05
b	0.30	0.50
c	0.08	0.15
D	2.80	3.00
E	1.20	1.40
E1	2.25	2.55
e	0.95 REF.	
e1	1.80	2.00
L	0.55 REF.	
L1	0.30	0.50
θ	0°	8°

NOTICE

The information presented in this document is for reference only. Involving product optimization and productivity improvement, ChipNobo reserves the right to adjust product indicators and upgrade some technical parameters. ChipNobo is entitled to be exempted from liability for any delay or non-delivery of the information disclosure process that occurs.

本文件中提供的信息仅供参考。涉及产品优化和生产效率改善，ChipNobo 有权调整产品指标和部分技术参数的升级，所出现信息披露过程存在延后或者不能送达的情形，ChipNobo 有获免责权。

The product listed herein is designed to be used with residential and commercial equipment, and do not support sensitive items and specialized equipment in areas where sanctions do exist. ChipNobo Co., Ltd or anyone on its behalf, assumes no responsibility or liability for any damages resulting from improper use.

此处列出的产品旨在民用和商业设备上使用，不支持确有制裁地区的敏感项目和特殊设备，ChipNobo 有限公司或其代表，对因不当使用而造成的任何损害不承担任何责任。

For additional information, please visit our website <https://www.chipnobo.com/en> or consult your nearest Chipnobo sales office for further assistance.

欲了解更多信息，请访问我们的网站 <https://www.chipnobo.com/en>，或咨询离您最近的 Chipnobo 销售办事处以获得进一步帮助。